Connection Guide
OMEX 600/700

Serial Connection

The ECU will be connected via the "Serial Add-On" which needs to be purchased together with the display. It provides a RS232 port, where the OMEX can be plugged in directly

ECU setup

Your 600 ECU needs to be on firmware "V0.70D", 700 needs to be on "0.70C".

Open the MAP4000 software on your computer/laptop. In tab 3 activate "Tele1 Chan0" and "Telemetry UART".
Afterwards navigate to "Telemetry" and "Serial Telemetry Setup" and change the values as shown.
Afterwards save your settings with „CTRL-K".

Serielle Verbindung

Das Steuergerät wird über den „Seriellen Adapter" mit dem Display verbunden. Dieser muss zusätzlich zum Display erworben werden. Der Stecker der OMEX wird dort direkt angeschlossen.

Steuergerät Einstellungen

Die OMEX 600 muss auf Firmware „0.70D" und die OMEX 700 mindestens auf „0.70C" sein.

Bitte die MAP400 Software öffnen und im 3. Reiter die Option "Tele1 Chan0" and "Telemetry UART" aktivieren.
Anschließend im Menü „Telemetry" – „Serial Telemetry Setup" öffnen und die Werte wie angegeben anpassen.
Anschließend die Werte ins Steuergerät speichern mit „Ctrl-K".

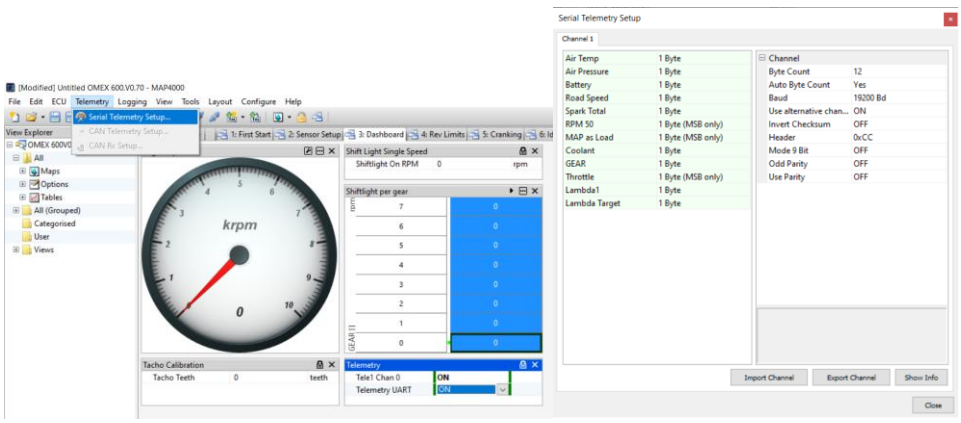

We hope you have as much fun with your CANchecked display as we do. If you have any questions, you are welcome to contact us via the ticket system (https://www.canchecked.de/ticket) and discuss your concerns with us.

We have also created a group for the community on Facebook, where you can exchange ideas with other users and find the solution to one or the other question:

https://www.facebook.com/groups/CANchecked/

Wir hoffen, du hast mit deinem CANchecked Display genauso viel Spaß wie wir. Sollten Fragen auftauchen, kannst du uns gerne über das Ticketsystem (https://www.canchecked.de/ticket) kontaktieren und uns dein Anliegen erörtern.

Wir haben außerdem auf Facebook eine Gruppe für die Community erstellt, hier kannst du dich mit anderen Usern austauschen und die Lösung für die ein oder andere Frage finden:

https://www.facebook.com/groups/CANchecked/